


Progressive Timber



*Inspired By Nature,
Made Possible By...*

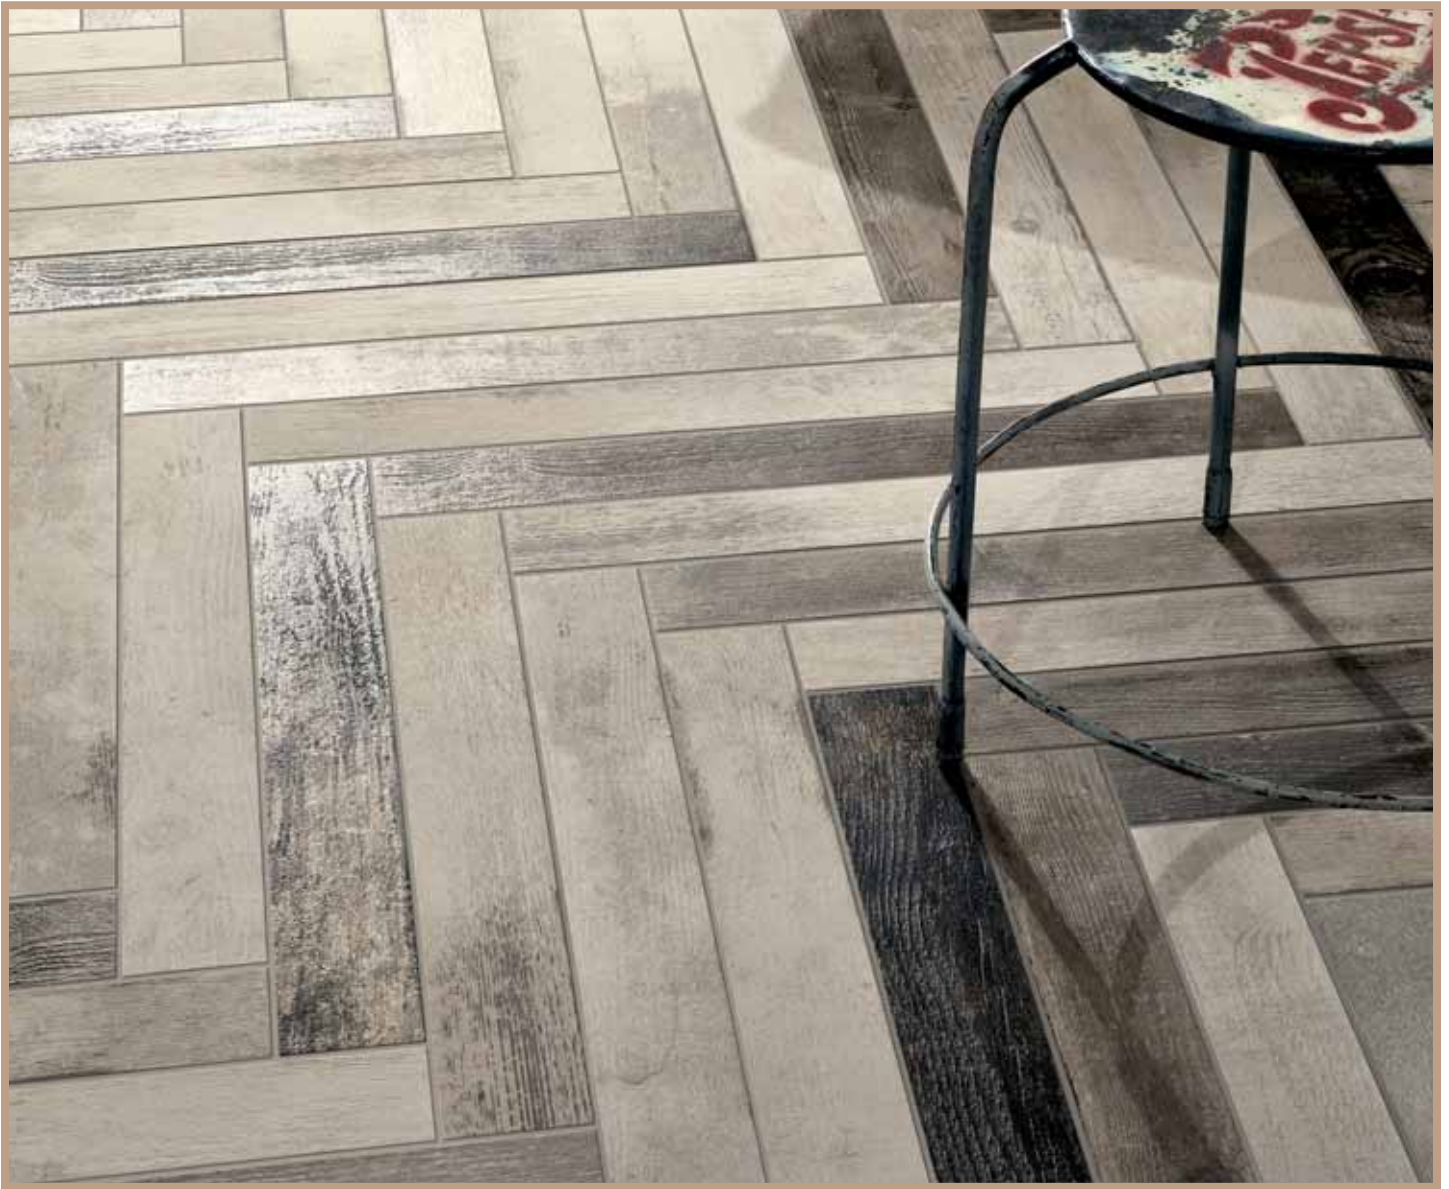

DOMPRWH324



* 4 pieces to show variation *

| 3x24 planks |

DOMPRWHMOS22



12x12 sheet

| 2x2 mosaic |

DOMPRWH324CHEV



* 4 pieces to show variation *

| 3x24 chevron |

DOMPRWHMOSCHEV



15x15 sheet

| chevron mosaic |



DOMPRGR324



* 4 pieces to show variation *

| 3x24 planks |

DOMPRGRMOS22



12x12 sheet

| 2x2 mosaic |

DOMPRGR324CHEV



* 4 pieces to show variation *

| 3x24 chevron |

DOMPRGRMOSCHEV



15x15 sheet

| chevron mosaic |



DOMPRBK324



* 4 pieces to show variation *

| 3x24 planks |


DOMPRBKMOS22



12x12 sheet

| 2x2 mosaic |

DOMPRBK324CHEV

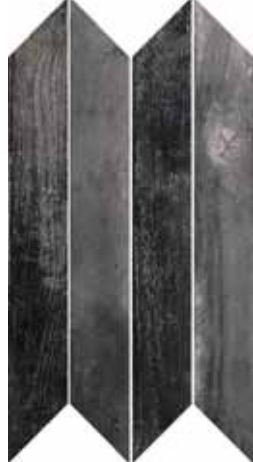

* 4 pieces to show variation *

| 3x24 chevron |

DOMPRBKMOSCHEV



15x15 sheet

| chevron mosaic |



DOMPRBU324



* 4 pieces to show variation *

| 3x24 planks |

DOMPRBUMOS22



12x12 sheet

| 2x2 mosaic |

DOMPRBU324CHEV



* 4 pieces to show variation *

| 3x24 chevron |


DOMPRBUMOSCHEV



15x15 sheet

| chevron mosaic |

"WOOD-LOOK" PORCELAIN STONEWARE

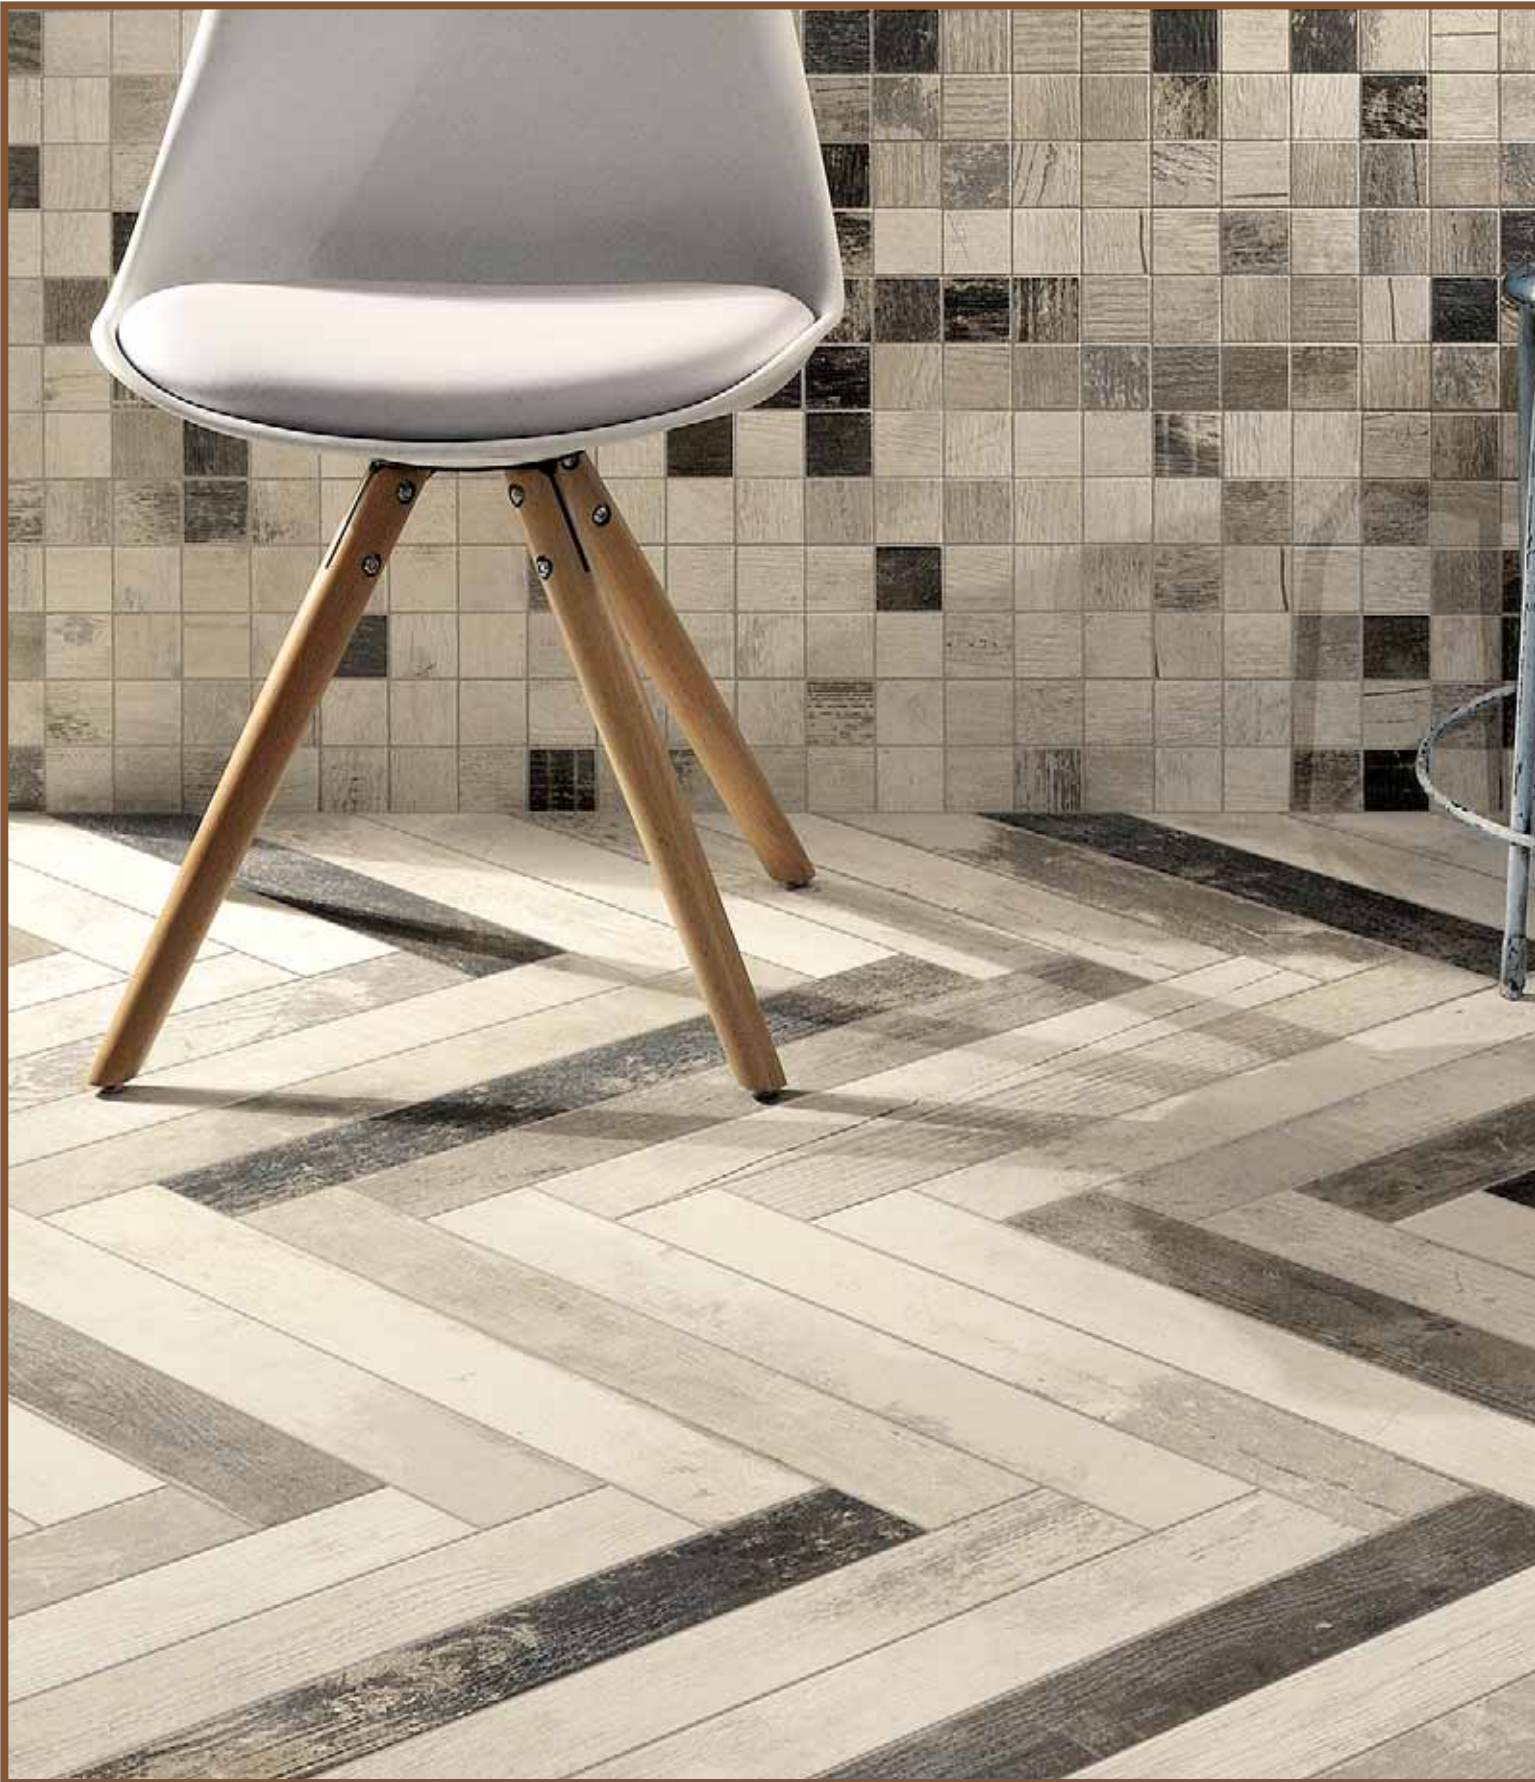


Progressive Timber



7,8x61 - 3"x24"


Naturale/Rettificato - Unpolished/Rectified

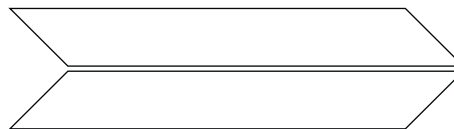

CHEVRON

7,8x53,3 - 3"x21"


Naturale/Rettificato - Unpolished/Rectified



MOSAICO 5x5 - 2"x2"

in fogli 30x30 - 12"x12" da 36 pezzi

Naturale/Rettificato - Unpolished/Rectified



MOSAICO LISCA

in fogli 37,5x37,5 - 15"x15" da 60 pezzi

Naturale/Rettificato - Unpolished/Rectified

Suggested Applications

floor wall residential light commercial heavy commercial exterior pools

Installation Suggestions

joint size modular setting plank installation edge: S straight R rustic Re rectified finish: matte polished structured honed semi-polished other

Porcelain Type

through-body color-bodied glazed unglazed double-loaded other

Shade Variation

V1 Uniform Appearance V2 Slight Variation V3 Moderate Variation V4 Substantial Variation

thickness: 9 mm inches

Slip Resistance

COF (coefficient of friction)
 WET: standard* .6 result >.4
 DRY: standard* .6 result >.4
 accessible routes: .8
 ramps: .8
 Values: 0-0.50 Questionable, 0.50-0.60 Conditionally Slip Resistant, >0.60 Slip Resistant
 Tile Classification: DCOF .42

DIN 51130: R9* 3-10°, R10 10-19°, R11 19-27°, R12 27-35°, R13 >35°

DIN 51097 Class: A Barefoot, but mainly dry aisles and walkways, dry changing areas ≥12°, B Shower rooms, pool surrounds, wet changing areas, disinfectant spray areas (plus all Class A areas) ≥18°, C Areas constantly under water, e.g. steps into pools, foot baths, included pool surrounds, jacuzzis (plus all Class A&B areas) ≥24°

ASTM C-1028
 DIN 51097/51130

Scratch Resistance

Mineral
 1. Talc (Talc)
 2. Gypsum (Fingernail)
 3. Calcite (Penny)
 4. Fluorite (Some Marbles)
 5. Apatite (Knife Blade)

Mineral
 6. Microline (Glass, Glazed Tile)
 7. Quartz (Unglazed Porcelain)
 8. Topaz (Granite)
 9. Corundum (Ruby)
 10. Diamond (Diamond)

Industry standard ≤175mm²

Wear Resistance

PEI RATING UNI EN ISO 10545.7

Class 1: Walls only
 Class 2: Resid. floors w/minimal abrasive traffic.
 Class 3: Resid. interiors normal use and foot traffic.
 Class 4: Light-medium commercial applications.
 Class 5: Commercial applications.

Stain Resistance

5: Removed after 5 minutes (hot water running)
 4: Removed by manual cleaning (weak detergent)
 3: Removed by mechanical cleaning (strong detergent)
 2: Removed by immersion (24 hrs in suitable solvent)
 1: Stain not removed

ASTM C1378-04
 UNI EN ISO 10545.14

Water Absorption

ASTM C-373
 UNI EN ISO 10545.3

Absorbs 0-.5% Impervious Interior/exterior Frost Resistant
 Absorbs .5-3% Vitreous Interior/exterior Frost Resistant
 Absorbs 3-7% Semi-Vitreous Indoor use only
 Absorbs 7%+ Non-Vitreous Indoor use only

Breaking Strength

Industry standard should be greater than 250 lbs or 50 N/MM²

ASTM C648
 UNI EN ISO 10545.4

Facial Dimension

ASTM c499-09
 UNI EN ISO 10545.02

	Standard	Tolerance	Result
flatness	± 5mm	± .5%	
thickness	± 6mm	± .5%	
straightness	± 4.5mm	± .5%	
squareness	± 5.4mm	± .6%	
sides L/W	± 1.1mm / ± 4.5mm	± .5%	

Chemical Resistance

ASTM C650
 UNI EN ISO 10545.13

Allowances for:

acid
 bases
 chemicals

Leed Information

REQUIREMENTS FOR COMMERCIAL INTERIORS/NEW CONSTRUCTION

Sustainable Sites	Allowances for:	
	1 Point	2 Points
Site selection SS CREDIT 1 Heat Island Effect-non roof Material with a solar reflectant index of at least 29.	<input type="checkbox"/>	<input type="checkbox"/>
Energy & Atmosphere EA CREDIT 4 Green Power: Products that optimize energy performance for floors and walls using thermal conductivity. BTU-FT	<input type="checkbox"/>	<input type="checkbox"/>
Indoor Environmental Quality Low-Emitting Materials-Flooring Systems IEQ CREDIT 3.1-7 Green Cleaning: Reducing occupants exposure to hazardous cleaning chemicals.	<input type="checkbox"/>	<input type="checkbox"/>
IEQ CREDIT 4.1 Low Emitting Adhesives: Products less than 65 G/L VOC	<input type="checkbox"/>	<input type="checkbox"/>
IEQ CREDIT 4.3 Low Emitting Materials: Flooring systems.	<input type="checkbox"/>	<input type="checkbox"/>
Materials & Resources M&R CREDIT 2 Construction Waste Management: Recycling salvaged construction waste in to new reusable materials.	50% <input type="checkbox"/>	70% <input type="checkbox"/>
M&R CREDIT 4.1-4.2 Recycled Content: The sum of post consumer plus 1/2 of the pre consumer reps at least 10-20% of total value of materials.	10% <input type="checkbox"/>	20% <input type="checkbox"/>
M&R CREDIT 5 Regional Materials: Materials manufactured within 500 miles of the project site.	10% <input type="checkbox"/>	20% <input type="checkbox"/>
Innovation in Design ID CREDIT 1 Innovation in Design Measurable exemplary environmental performance.	1-5 Points <input type="checkbox"/>	

Type: Porcelain Stoneware
 Product Line: Progressive Timber